




NTN DRIVESHAFT ANDERSON, INC.

INA TASE55 bearing units

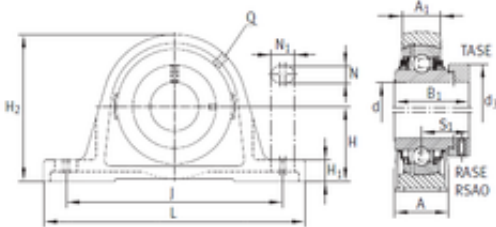

TASE55 Bearing 2D drawings and 3D CAD models

Bearing No. TASE55

Bore Diameter	55 mm
d	55 mm
S1	43,6 mm
Thread (Q)	Rp1/8
d3	76 mm
A	60 mm
A1	35 mm
B1	71,4 mm
H	63,5 mm
H1	22,5 mm
H2	124,5 mm
J	176 mm
L	222 mm
N	18 mm
N1	30 mm
Weight	3,51 Kg
Basic dynamic load rating (C)	43,5 kN
Category	Pillow Block Bearings
Inventory	0.0
Manufacturer Name	SCHAEFFLER GROUP
Minimum Buy Quantity	N/A
Weight / Kilogram	3.712
Product Group	M06110
Number of Mounting Holes	2
Mounting Method	Eccentric Collar
Housing Style	2 Bolt Pillow Block



NTN DRIVESHAFT ANDERSON, INC.

Rolling Element	Ball Bearing
Housing Material	Cast Iron
Expansion / Non-expansion	Non-expansion
Relubricatable	Yes
Insert Part Number	GE55KPPB3
Seals	Double Triply
Housing Configuration	1 Piece Solid
Inch - Metric	Metric
Other Features	Single Row Standard Shaft Height With Set Screw
Long Description	2 Bolt Pillow Block; 55MM Bore; 63.5MM Base to Center Height; Eccentric Collar Mount; Ball Bearing; 164.5MM Minimum Bolt Spacing; 187MM Bolt Spacing Maximum; Relubricatable; Cast Iron; Double Triply;
Category	Pillow Block
UNSPSC	31171511
Harmonized Tariff Code	8483.20.40.40
Noun	Bearing
Keyword String	Pillow Block
Manufacturer URL	http://www.ina.com
Manufacturer Item Number	TASE55
Weight / LBS	8.82
Bolt Spacing Minimum	6.476 Inch 164.5Millimeter
Actual Bolt Center to Center	0 Inch 0Millimeter
Bore	2.165 Inch 55 Millimeter
Bolt Spacing Maximum	7.362 Inch 187Millimeter
Length Thru Bore	2.811 Inch 71.4 Millimeter
Nominal Bolt Center to Center	6.8 Inch 171.5 Millimeter



NTN DRIVESHAFT ANDERSON, INC.

Base to Center Height

2.5 Inch 63.5 Millimeter
