




# NTN DRIVESHAFT ANDERSON, INC.

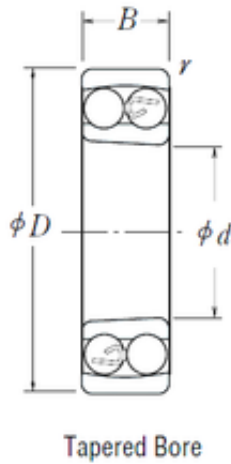

40 mm x 80 mm x 23 mm NSK 2208 K self aligning ball bearings

Bearing No. 2208 K

|                               |             |
|-------------------------------|-------------|
| Size                          | 40x80x23 mm |
| Bore Diameter                 | 40 mm       |
| Outer Diameter                | 80 mm       |
| Width                         | 23 mm       |
| d                             | 40 mm       |
| D                             | 80 mm       |
| B                             | 23 mm       |
| C                             | 23 mm       |
| r min.                        | 1,1 mm      |
| da min.                       | 46,5 mm     |
| Da max.                       | 73,5 mm     |
| ra max.                       | 1 mm        |
| Weight                        | 0,477 Kg    |
| Basic dynamic load rating (C) | 22,4 kN     |
| Basic static load rating (C0) | 7,35 kN     |
| (Grease) Lubrication Speed    | 7 500 r/min |
| (Oil) Lubrication Speed       | 9 000 r/min |
| Calculation factor (e)        | 0,33        |
| Calculation factor (Y0)       | 2           |
| Calculation factor (Y2)       | 3           |

2208 K Bearing 2D drawings and 3D CAD models