




NTN DRIVESHAFT ANDERSON, INC.

40 mm x 90 mm x 23 mm NTN 4T-30308C tapered roller bearings

Bearing No. 4T-30308C

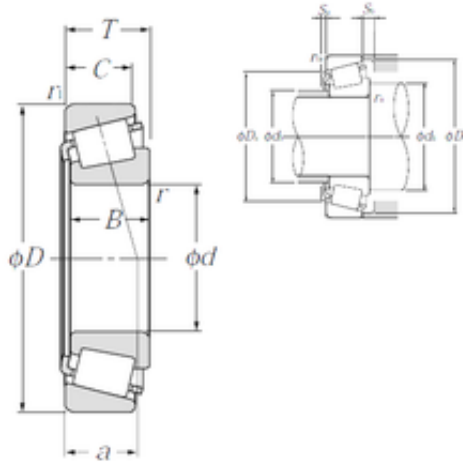

4T-30308C Bearing 2D drawings and 3D CAD models

Size	40x90x25.25 mm
Bore Diameter	40 mm
Outer Diameter	90 mm
Width	25,25 mm
d	40 mm
D	90 mm
T	25,25 mm
B	23 mm
C	19 mm
ra1 max.	1,5 mm
a	23 mm
r min.	2 mm
r1 min.	1,5 mm
da min.	50 mm
Da min	72 mm
Da max.	80 mm
db max.	50 mm
Db min.	85,5 mm
ra max.	2 mm
Sa	3,5 mm
Sb	6 mm
Weight	0,728 Kg
Basic dynamic load rating (C)	83 kN
Basic static load rating (C0)	87 kN
(Grease) Lubrication Speed	4 200 r/min



NTN DRIVESHAFT ANDERSON, INC.

(Oil) Lubrication Speed	5 600 r/min
Calculation factor (e)	0,55
Calculation factor (Y0)	0,6