




NTN DRIVESHAFT ANDERSON, INC.

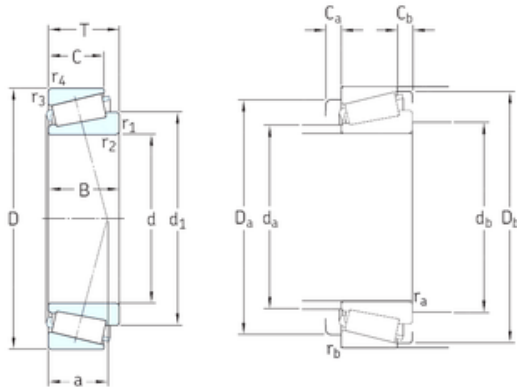

30 mm x 72 mm x 27 mm SKF 32306J2/Q tapered roller bearings

Bearing No. 32306J2/Q

32306J2/Q Bearing 2D drawings and 3D CAD models

Size	30x72x28.75 mm
Bore Diameter	30 mm
Outer Diameter	72 mm
Width	28,75 mm
d	30 mm
D	72 mm
T	28,75 mm
B	27 mm
C	23 mm
a	18 mm
d1	48,7 mm
r1 min.	1,5 mm
r2 min.	1,5 mm
r3 min.	1,5 mm
r4 min.	1,5 mm
Ca min.	4 mm
Cb min.	5,5 mm
da max	39 mm
Da min	59 mm
Da max.	65 mm
db min	37 mm
Db min.	66 mm
ra max.	1,5 mm
rb max.	1,5 mm
Weight	0,55 Kg



NTN DRIVESHAFT ANDERSON, INC.

Basic dynamic load rating (C)	76,5 kN
Basic static load rating (C0)	85 kN
Fatigue load limit (Pu)	9,65
Reference speed	7000 r/min
Limiting speed	10000 r/min
Calculation factor (e)	0,31
Calculation factor (Y)	1,9