




NTN DRIVESHAFT ANDERSON, INC.

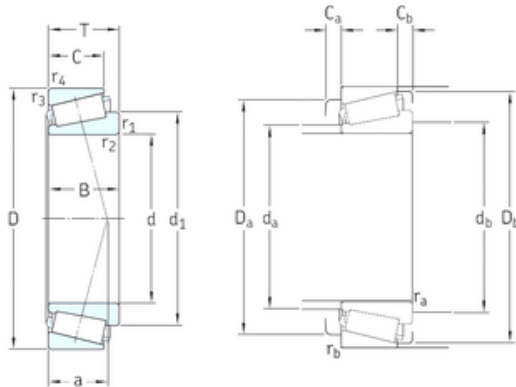

133,35 mm x 196,85 mm x 46,038 mm SKF
67391/67322 tapered roller bearings

Bearing No. 67391/67322

67391/67322 Bearing 2D drawings and 3D CAD models

Size	133.35x196.85x46.038 mm
Bore Diameter	133,35 mm
Outer Diameter	196,85 mm
Width	46,038 mm
d	133,35 mm
D	196,85 mm
T	46,038 mm
B	46,038 mm
C	38,1 mm
a	39 mm
d1	164 mm
r1 min.	8 mm
r2 min.	8 mm
r3 min.	3,3 mm
r4 min.	3,3 mm
Ca min.	7 mm
Cb min.	7,5 mm
da max	146 mm
Da min	177 mm
Da max.	185 mm
db min	161 mm
Db min.	189 mm
ra max.	7 mm
rb max.	3,1 mm
Weight	4,65 Kg



NTN DRIVESHAFT ANDERSON, INC.

Basic dynamic load rating (C)	319 kN
Basic static load rating (C0)	585 kN
Fatigue load limit (Pu)	60
Reference speed	2200 r/min
Limiting speed	3400 r/min
Calculation factor (e)	0,35
Calculation factor (Y)	1,7
Category	Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0
Product Group	B04334
Dimension series	67300
d ₁	164.45 mm
r _{1,2} min.	8 mm
r _{3,4} min.	3.3 mm
d _a max.	146 mm
d _b min.	157.5 mm
D _a min.	177 mm
D _a max.	183 mm
D _b min.	189 mm
C _a min.	7 mm
C _b min.	7.5 mm
r _a max.	8 mm
r _b max.	3.3 mm
Basic dynamic load rating C	395 kN
Basic static load rating C ₀	585 kN
Fatigue load limit P _u	60 kN
Calculation factor e	0.35
Calculation factor Y	1.7
Calculation factor Y ₀	0.9



NTN DRIVESHAFT ANDERSON, INC.

Mass bearing	4.65 kg
--------------	---------