




# NTN DRIVESHAFT ANDERSON, INC.

## INA PCJT25-N bearing units

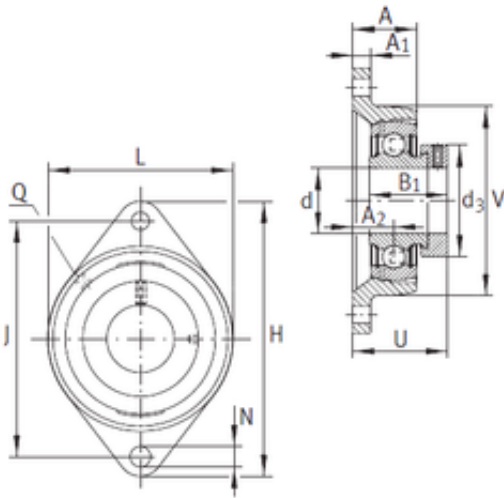

PCJT25-N Bearing 2D drawings and 3D CAD models

Bearing No. PCJT25-N

Bore Diameter	25 mm
d	25 mm
V	70 mm
U	42,5 mm
Thread (Q)	Rp1/8
d3	37,5 mm
A	26,5 mm
A1	11 mm
B1	31 mm
H	124 mm
J	99 mm
L	70 mm
N	11,5 mm
A2	19 mm
Weight	0,58 Kg
Basic dynamic load rating (C)	14 kN
Category	Flange Block Bearings
Inventory	0.0
Manufacturer Name	SCHAEFFLER GROUP
Minimum Buy Quantity	N/A
Weight / Kilogram	0.707
EAN	4012802837490
Product Group	M06110
Number of Mounting Holes	2
Mounting Method	Eccentric Collar
Housing Style	2 Bolt Flange Block



## NTN DRIVESHAFT ANDERSON, INC.

Rolling Element	Ball Bearing
Housing Material	Cast Iron
Expansion / Non-expansion	Non-expansion
Mounting Bolts	11.5 Millimeter
Relubricatable	Yes
Insert Part Number	GRAE25NPPB
Seals	Double Lip Contact
Housing Configuration	1 Piece Solid
Pilot Configuration	No Pilot
Inch - Metric	Metric
Long Description	2 Bolt Flange Block; 25MM Bore; 99MM Bolt Circle; 99MM Bolt Spacing; 1 Piece Solid; Eccentric Collar Mount; Cast Iron; Ball Bearing; 31MM Length Thru Bore; Relubricatable; Double Lip Contact Seals
Other Features	Single Row   With Set Screw
Category	Flange Block
UNSPSC	31171501
Harmonized Tariff Code	8483.20.40.40
Noun	Bearing
Keyword String	Flanged
Manufacturer URL	<a href="http://www.ina.com">http://www.ina.com</a>
Manufacturer Item Number	PCJT25N
Weight / LBS	1.544
Cartridge Pilot Depth	0 Inch   0 Millimeter
Bore	0.984 Inch   25 Millimeter
Length Thru Bore	1.22 Inch   31 Millimeter
Bolt Spacing	3.9 Inch   99 Millimeter
Nominal Bolt Circle Diameter Round	3.9 Inch   99 Millimeter
Cartridge Pilot Diameter	0 Inch   0 Millimeter