




NTN DRIVESHAFT ANDERSON, INC.

65 mm x 140 mm x 33 mm NTN 6313LLB deep groove ball bearings

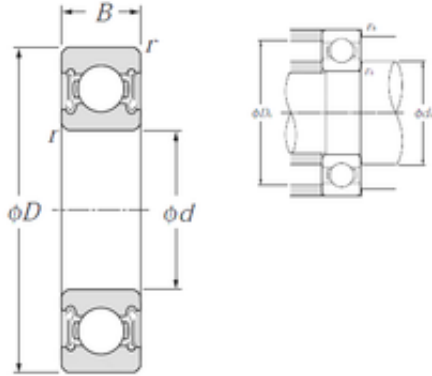

Bearing No. 6313LLB

6313LLB Bearing 2D drawings and 3D CAD models

Size	65x140x33 mm
Bore Diameter	65 mm
Outer Diameter	140 mm
Width	33 mm
d	65 mm
D	140 mm
B	33 mm
C	33 mm
r min.	2,1 mm
da min.	76 mm
da max	86 mm
Da max.	129 mm
ra max.	2 mm
Weight	2,08 Kg
Basic dynamic load rating (C)	92,5 kN
Basic static load rating (C0)	60 kN
(Grease) Lubrication Speed	4 900 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0
EAN	4547359005745
Product Group	B00308
Enclosure	2 Seals



NTN DRIVESHAFT ANDERSON, INC.

Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Non-Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	65MM Bore; 140MM Outside Diameter; 33MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Other Features	Deep Groove Non-Friction Nitrile Rubber Seal Shell Alvania Prelubricated
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Weight / LBS	4.885
Inner Race Width	0 Inch 0 Millimeter
Outside Diameter	5.512 Inch 140 Millimeter
Bore	2.559 Inch 65 Millimeter
Outer Race Width	1.299 Inch 33 Millimeter
bore diameter:	65 mm
static load capacity:	60000 N



NTN DRIVESHAFT ANDERSON, INC.

outside diameter:	140 mm
precision rating:	ISO Class 0
overall width:	33 mm
finish/coating:	Uncoated
bore type:	Round
bearing material:	High Carbon Chrome Steel
closure type:	Double Sealed
cage material:	Steel
row type & fill slot:	Single Row Non-Fill Slot
inner ring width:	33 mm
snap ring included:	Without Snap Ring
outer ring width:	33 mm
internal clearance:	CN
maximum rpm (grease):	4900 rpm
operating temperature range:	-40 to 120 ° C
fillet radius:	2.1 mm
dynamic load capacity:	92500 N
manufacturer product page:	Click here