




NTN DRIVESHAFT ANDERSON, INC.

NACHI 52212 thrust ball bearings

Bearing No. 52212

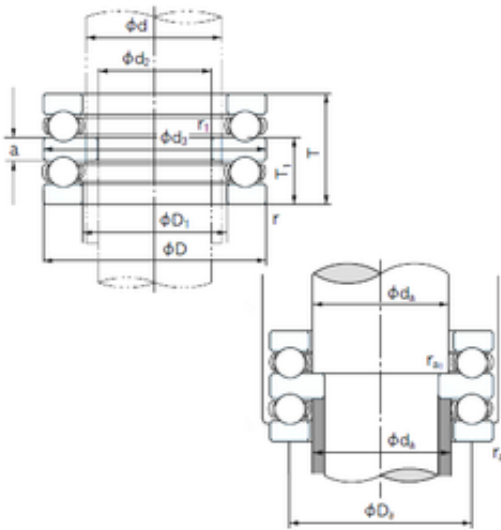

52212 Bearing 2D drawings and 3D CAD models

Size	60x95x46 mm
Bore Diameter	60 mm
Outer Diameter	95 mm
Width	46 mm
d	60 mm
d2	50 mm
D	95 mm
T	46 mm
ra1 max.	0.6 mm
T1	28 mm
a	10 mm
d3	95 mm
r min.	1 mm
r1 min.	0.6 mm
D1	62 mm
D2	78 mm
D3	100 mm
da min.	60 mm
Da max.	74 mm
ra max.	1 mm
Weight	1.25 Kg
Basic dynamic load rating (C)	73,5 kN
Basic static load rating (C0)	179 kN
(Grease) Lubrication Speed	2000 r/min
Category	Thrust Ball Bearing
Inventory	0.0



NTN DRIVESHAFT ANDERSON, INC.

Manufacturer Name	NACHI
Minimum Buy Quantity	N/A
Weight / Kilogram	0
Product Group	B00234
Rolling Element	Ball Bearing
Thrust Bearing	Yes
Single or Double Direction	Double Direction
Banded	No
Cage Material	Steel
Precision Class	Non-Precision
Component Description	Roller Assembly Plus Raceways
Other Features	Double Row With Flat Seat
Long Description	50MM Bore 1; 62MM Bore 2; 95MM Outside Diameter; 46MM Height; Ball Bearing; Double Direction; Not Banded; Steel Cage; Non-Precision
Inch - Metric	Metric
Category	Thrust Ball Bearings
UNSPSC	31171552
Harmonized Tariff Code	8482.10.50.08
Noun	Bearing
Keyword String	Ball Thrust
Manufacturer URL	http://www.nachi.com
Weight / LBS	2.75578
Bore 2	2.441 Inch 62 Millimeter
Bore 1	1.969 Inch 50 Millimeter
Height	1.811 Inch 46 Millimeter
Overall Height with Aligning Washer	0 Inch 0 Millimeter
Outside Diameter	3.74 Inch 95 Millimeter